





GRV12



| CODICE - CODE - ARTIKELNUMMER - CÒDIGO | M.U. | GRF12 | GRV1200220 | GRV1200222 |
|---|----------------|----------------|----------------|----------------|
| Tensione nominale - Rated voltage - Nennspannung - Tensión nominal | V , - | -- | 230 , 1 | 115 , 1 |
| Frequenza nominale - Nominal frequency - Nennfrequenz - Frecuencia nominal | Hz | -- | 50/60 | 50/60 |
| Portata aria - Fan flow - Luftmenge - Caudal aire ventil GRV | m³/h | -- | 50 | 50 |
| Portata aria - Fan flow - Luftmenge - Caudal aire ventil GRV +GRF | m³/h | -- | 36 1xGRF12 | 36 1xGRF12 |
| | | | 43 2xGRF12 | 43 2xGRF12 |
| Potenza assorbita - Power absorbed - Leistungsaufnahme - Potencia Absorbida | W | -- | 16 | 16 |
| Corrente assorbita - Absorbed current - Stromaufnahme - Corriente absorbida | A | -- | 0,13 | 0,26 |
| Fusibile T - Pre-fuse T - Absicherung T - Elemento previo de fusibile T | A | -- | 0,5 | 0,5 |
| Temp. interne di funzionamento - Internal operating temp. - Interne Betriebstemperatur - Temp. internas de funcionamiento | min/ max °C | -- | -10 / +70 | -10 / +70 |
| Grado di protezione - Protection rating - Schutzgrad -Grado de protección | CE IP | 44 | 44 | 44 |
| Pressione sonora esterna - External sound pressure - Externer Schalldruck - Presión sonora externa | dB(A) | -- | 53 | 53 |
| Altezza / Larghezza / Profondità - Height / Width / Depth - Höhe / Breite / Tiefe - Altura / Anchura / Profundidad | mm | 130 x 130 x 24 | 130 x 130 x 65 | 130 x 130 x 65 |

GRV25

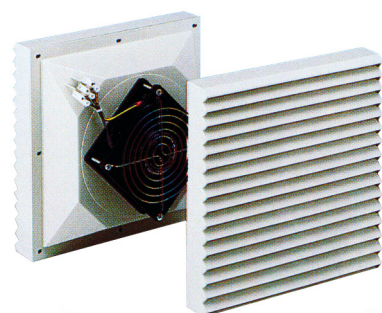

| CODICE - CODE - ARTIKELNUMMER - CÒDIGO | M.U. | GRF25 | GRV2500220 | GRV2500222 |
|---|----------------|----------------|-----------------|-----------------|
| Tensione nominale - Rated voltage - Nennspannung - Tensión nominal | V , - | -- | 230 , 1 | 115 , 1 |
| Frequenza nominale - Nominal frequency - Nennfrequenz - Frecuencia nominal | Hz | -- | 50/60 | 50/60 |
| Portata aria - Fan flow - Luftmenge - Caudal aire ventil GRV | m³/h | -- | 100 | 100 |
| Portata aria - Fan flow - Luftmenge - Caudal aire ventil GRV +GRF | m³/h | -- | 80 1xGRF25 | 80 1xGRF25 |
| | | | 89 2xGRF25 | 89 2xGRF25 |
| Potenza assorbita - Power absorbed - Leistungsaufnahme - Potencia Absorbida | W | -- | 16 | 16 |
| Corrente assorbita - Absorbed current - Stromaufnahme - Corriente absorbida | A | -- | 0,13 | 0,26 |
| Fusibile T - Pre-fuse T - Absicherung T - Elemento previo de fusibile T | A | -- | 0,5 | 0,5 |
| Temp. interne di funzionamento - Internal operating temp. - Interne Betriebstemperatur - Temp. internas de funcionamiento | min/ max °C | -- | -10 / +70 | -10 / +70 |
| Grado di protezione - Protection rating - Schutzgrad -Grado de protección | CE IP | 44 | 44 | 44 |
| Pressione sonora esterna - External sound pressure - Externer Schalldruck - Presión sonora externa | dB(A) | -- | 53 | 53 |
| Altezza / Larghezza / Profondità - Height / Width / Depth - Höhe / Breite / Tiefe - Altura / Anchura / Profundidad | mm | 255 x 255 x 40 | 255 x 255 x 130 | 255 x 255 x 130 |