



XVA - Indoor

Scambiatori di Calore Aria/Aria - Air/Air Heat Exchangers - Luft/Luft Wärmetauscher - Intercambiadores de calor Aire/Aire

Caratteristiche Generali

- Installazione interna/esterna
- Pacco di scambio in alluminio brevettato per garantire grande efficienza con dimensioni ridotte
- Resa specifica 16-85 W/k

Common Features

- Indoor/outdoor installation
- Patented heat exchange core made of aluminium, to ensure high efficiency with compact dimensions
- Specific Heat Transmission 16-85 W/K

Allgemeine Merkmale

- Innen- und Außenmontage
- Patentierter Wärmetauscher aus Aluminium, um maximale Effizienz bei kompakten Ausmaßen zu garantieren
- Spezifischer Wärmeaustausch 16-85 W/K

Características Comunes

- Instalación interior/exterior
- Estructura de intercambio en aluminio patentado para garantizar una gran eficiencia con dimensiones reducidas
- Rendimiento específico 16-85 W/k

Certificazioni - Certifications - Zertifizierungen - Certificaciones



- CE
- EAC
- UL Listed (Codice - Code - Artikelnummer - Código = EXW--U-----)



OPTIONAL

CODICE	Colore Speciale - Special Colour Sonderfarbe - Color Especial	Carpenteria - Housing - Gehäuse - Carcasa INOX AISI304
XVA16	OCAXNS06	OCAXI01
XVA35	OCAXNS03	OCAXI02
XVA50	OCAXNS03	OCAXI02
XVA80	OCAXNS01	OCAXI03
XVA90	OCAXNS01	OCAXI03




XVA16

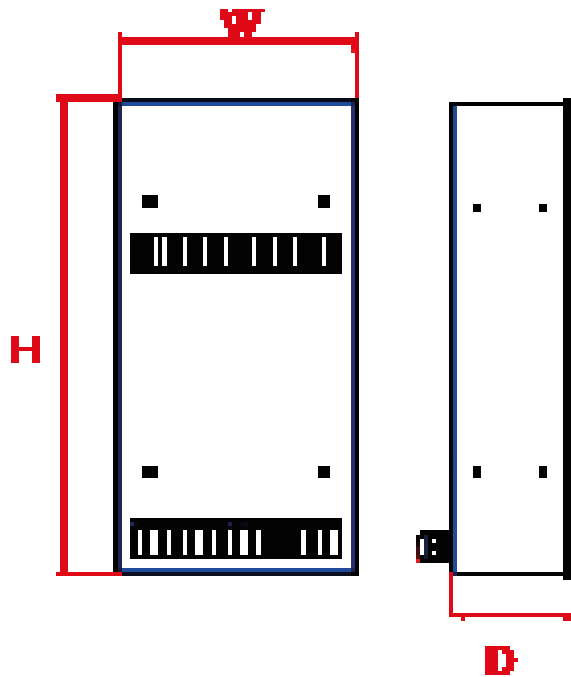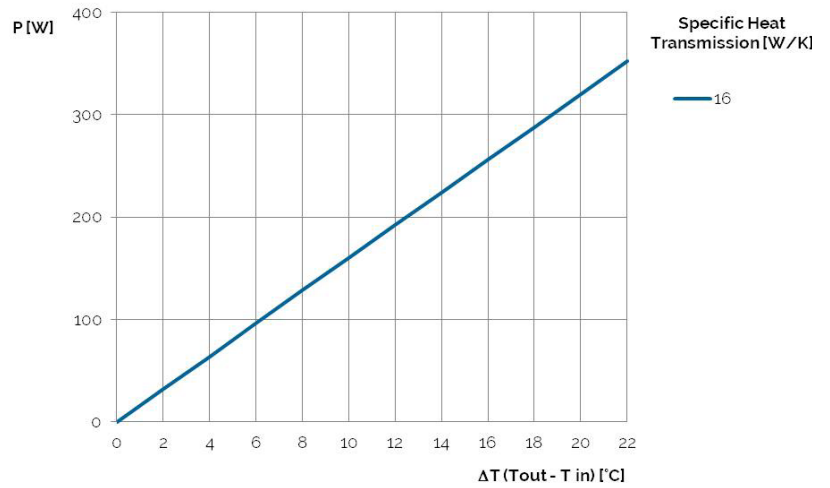

CODICE - CODE - ARTIKELNUMMER - CODIGO	M.U.	XVA1600320	XVA16U1303
Resa Specifica - Specific heat transmission - Spezifische Leistung - Rendimiento específico	W/K	16	16
UL		--	•
Alimentazione Power supply - Spannungsversorgung - Tensión	V-ph-Hz	230-1-50/60	115-1-60
Altezza / Larghezza / Profondità - Height / Width / Depth - Höhe / Breite / Tiefe - Altura / Ancho / Profundidad (HxWxD)	mm	410x204x109	410x204x109
Corrente assorbita - Absorbed current - Stromaufnahme - Corriente absorbida	A	0,6	0,6
Fusibile T - Pre-Fuse T - Absicherung T - Elemento previo de fusibile T	A	2	2
Potenza Assorbita - Power consumption - Leistungsaufnahme - Potencia absorbida	W	64	40
Limiti Interni Temperatura - Internal Temperature limits - Internen Temperaturgrenzwerte - Limites de temperatura interna	°C	-5 / +55	-5 / +55
Limiti Temperatura lato Ambiente - Side ambient Temperature limits - Umgebungstemperatur - Limites Temperatura lado ambiente	°C	-5 / +55	-5 / +55
Protezione lato armadio - Side cabinet protection degree - Schutzgrad Schrankseite - Protección lado armario	IP/Type	54 / -	- / 12
Rumorosità - Noise level - Geräuschpegel - Nivel de ruido	dB(A)	58	58
Peso - Weight - Gewicht - Peso	kg	4,6	4,6
Installazione - Installation - Installation - Instalación		Internal/External	Internal/External
Termostato Meccanico - Mechanical Thermostat - Mechanischer Thermostat - Termostato mecánico		No	No





XVA35

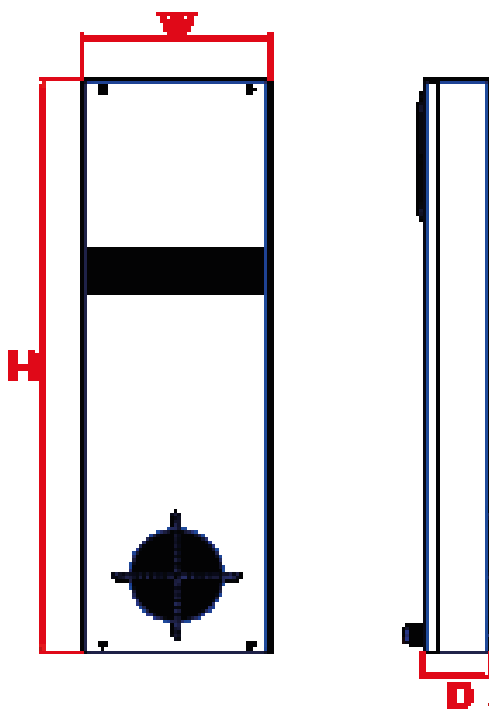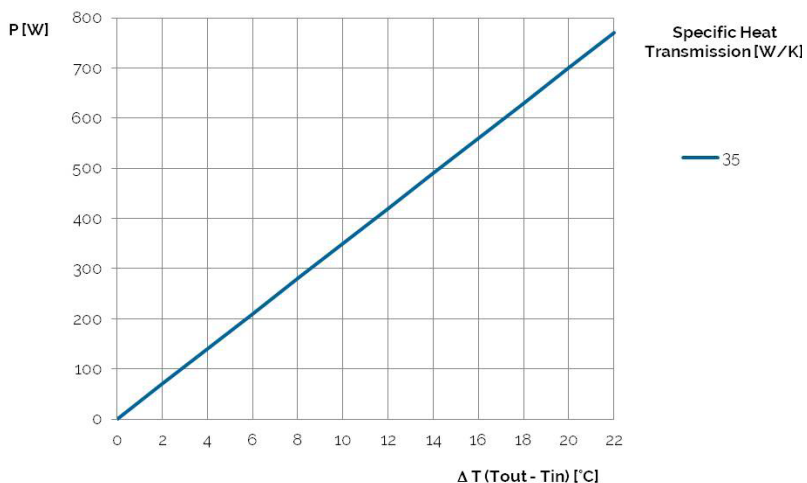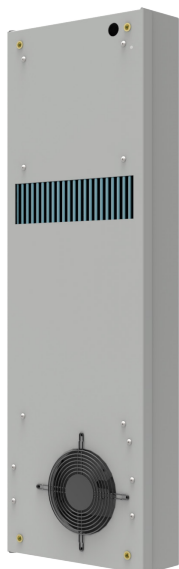

CODICE - CODE - ARTIKELNUMMER - CODIGO	M.U.	XVA3500320	XVA35T0120	XVA35T0220	XVA35U1320	XVA35U1303
Resa Specifica - Specific heat transmission - Spezifische Leistung Rendimiento específico	W/K	35	35	35	35	35
UL		--	--	--	•	•
Alimentazione Power supply - Spannungsversorgung - Tensión	V-ph-Hz	230-1-50/60	230-1-50/60	230-1-50/60	230-1-50/60	115-1-60
Altezza / Larghezza / Profondità - Height / Widht / Depth - Höhe / Breite / Tiefe - Altura / Ancho / Profundidad (HxWxD)	mm	780x254x90	780x254x90	780x254x90	780x254x90	780x254x90
Corrente assorbita - Absorbed current - Stromaufnahme - Corriente absorbida	A	0,46 / 0,58	0,46 / 0,58	0,46 / 0,58	0,8	1,1
Fusibile T - Pre-Fuse T - Absicherung T - Elemento previo de fusibile T	A	2	2	2	2	4
Potenza Assorbita - Power consumption - Leistungsaufnahme - Potencia absorbida	W	100 / 130	100 / 130	100 / 130	150	180
Limiti Interni Temperatura - Internal Temperature limits - Internen Temperaturgrenzwerte - Limites de temperatura interna	°C	-5 / +55	-5 / +55	-5 / +55	-5 / +55	-5 / +55
Limiti Temperatura lato Ambiente - Side ambient Temperature limits Umgebungstemperatur - Limites Temperatura lado ambiente	°C	-5 / +55	-5 / +55	-5 / +55	-5 / +55	-5 / +55
Protezione lato armadio - Side cabinet protection degree Schutzgrad Schrankseite - Protección lado armario	IP/Type	55 / -	55 / -	55 / -	- / 12	- / 12
Rumorosità - Noise level - Geräuschpegel - Nivel de ruido	dB(A)	76	76	76	76	76
Peso - Weight - Gewicht - Peso	kg	7,5	7,5	7,5	7,5	7,5
Installazione - Installation - Installation - Instalación		Internal/ External	Internal	External	Internal/ External	Internal/ External
Termostato Meccanico - Mechanical Thermostat Mechanischer Thermostat - Termostato mecánico		No	Yes	Yes	No	No




XVA50

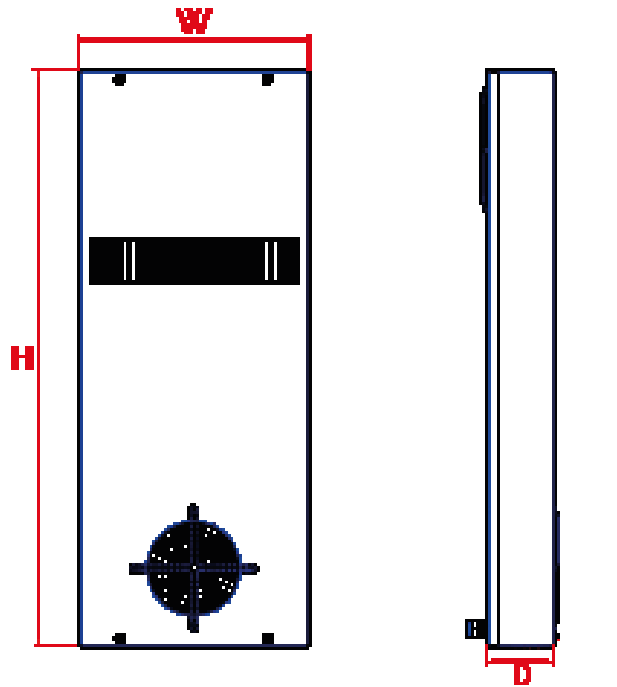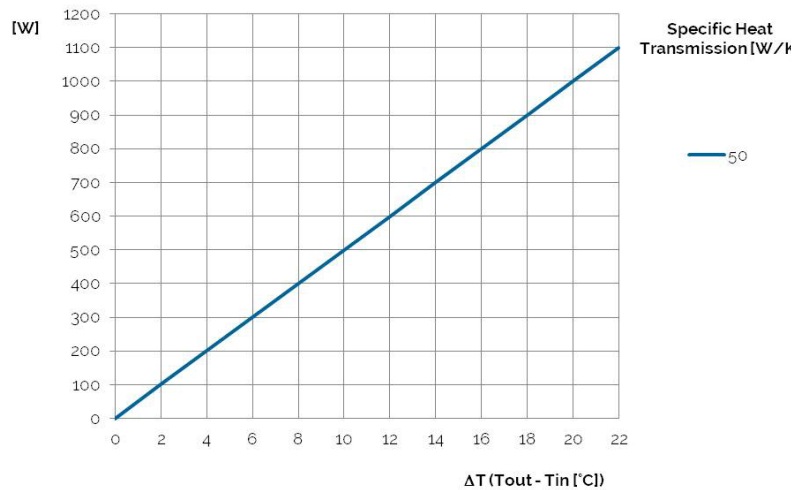

CODICE - CODE - ARTIKELNUMMER - CODIGO	M.U.	XVA5000320	XVA50T0120	XVA50T0220	XVA50U1320	XVA50U1303
Resa Specifica - Specific heat transmission - Spezifische Leistung Rendimiento específico	W/K	50	50	50	50	50
UL		--	--	--	•	•
Alimentazione Power supply - Spannungsversorgung - Tensión	V-ph-Hz	230-1-50/60	230-1-50/60	230-1-50/60	230-1-50/60	115-1-60
Altezza / Larghezza / Profondità - Height / Width / Depth - Höhe / Breite / Tiefe - Altura / Ancho / Profundidad (HxWxD)	mm	780x312x90	780x312x90	780x312x90	780x312x90	780x312x90
Corrente assorbita - Absorbed current - Stromaufnahme - Corriente absorbida	A	0,46 / 0,58	0,46 / 0,58	0,46 / 0,58	0,8	1,4
Fusibile T - Pre-Fuse T - Absicherung T - Elemento previo de fusibile T	A	2	2	2	2	4
Potenza Assorbita - Power consumption - Leistungsaufnahme - Potencia absorbida	W	100 / 130	100 / 130	100 / 130	150	180
Limiti Interni Temperatura - Internal Temperature limits - Internen Temperaturgrenzwerte - Limites de temperatura interna	°C	- 5 / +55	- 5 / +55	- 5 / +55	- 5 / +55	- 5 / +55
Limiti Temperatura lato Ambiente - Side ambient Temperature limits Umgebungstemperatur - Limites Temperatura lado ambiente	°C	- 5 / +55	- 5 / +55	- 5 / +55	- 5 / +55	- 5 / +55
Protezione lato armadio - Side cabinet protection degree Schutzgrad Schrankseite - Protección lado armario	IP/Type	55 / -	55 / -	55 / -	- / 12	- / 12
Rumorosità - Noise level - Geräuschpegel - Nivel de ruido	dB(A)	76	76	76	76	76
Peso - Weight - Gewicht - Peso	kg	9,5	9,5	9,5	9,5	9,5
Installazione - Installation - Installation - Instalación		Internal/ External	Internal	External	Internal/ External	Internal/ External
Termostato Meccanico - Mechanical Thermostat Mechanischer Thermostat - Termostato mecánico		No	Si	Si	No	No






XVA80

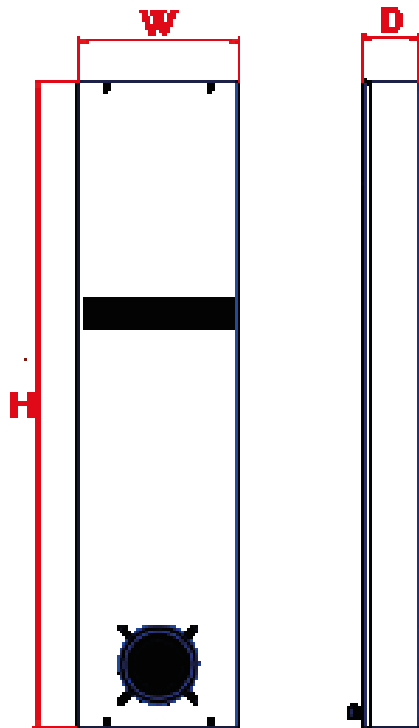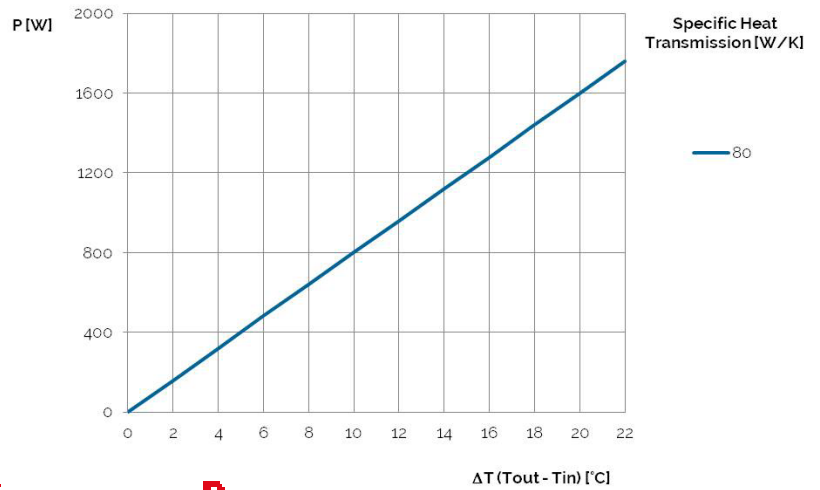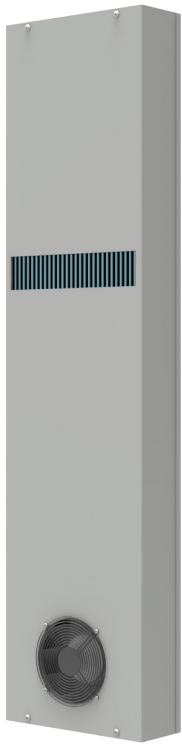

CODICE - CODE - ARTIKELNUMMER - CODIGO	M.U.	XVA8000320	XVA80U1320	XVA80U1303
Resa Specifica - Specific heat transmission - Spezifische Leistung - Rendimiento específico	W/K	80	80	80
UL		--	•	•
Alimentazione Power supply - Spannungsversorgung - Tensión	V-ph-Hz	230-1-50/60	230-1-50/60	115-1-60
Altezza / Larghezza / Profondità - Height / Widht / Depth - Höhe / Breite / Tiefe - Altura / Ancho / Profundidad (HxWxD)	mm	1250x311x108	1250x311x108	1250x311x108
Corrente assorbita - Absorbed current - Stromaufnahme - Corriente absorbida	A	0,72 / 0,96	1,3	2,3
Fusibile T - Pre-Fuse T - Absicherung T - Elemento previo de fusibile T	A	2	4	4
Potenza Assorbita - Power consumption - Leistungaufnahme - Potencia absorbida	W	160 / 200	180	230
Limiti Interni Temperatura - Internal Temperature limits - Internen Temperaturgrenzwerte - Limites de temperatura interna	$^{\circ}C$	-5 / +55	-5 / +55	-5 / +55
Limiti Temperatura lato Ambiente - Side ambient Temperature limits - Umgebungstemperatur - Limites Temperatura lado ambiente	$^{\circ}C$	-5 / +55	-5 / +55	-5 / +55
Protezione lato armadio - Side cabinet protection degree - Schutzgrad Schrankseite - Protección lado armario	IP/Type	55 / -	- / 12	- / 12
Rumorosità - Noise level - Geräuschpegel - Nivel de ruido	dB(A)	76	76	76
Peso - Weight - Gewicht - Peso	kg	20	20	20
Installazione - Installation - Installation - Instalación		Internal/External	Internal/External	Internal/External
Termostato Meccanico - Mechanical Thermostat - Mechanischer Thermostat - Termostato mecánico		No	No	No

XVAgo

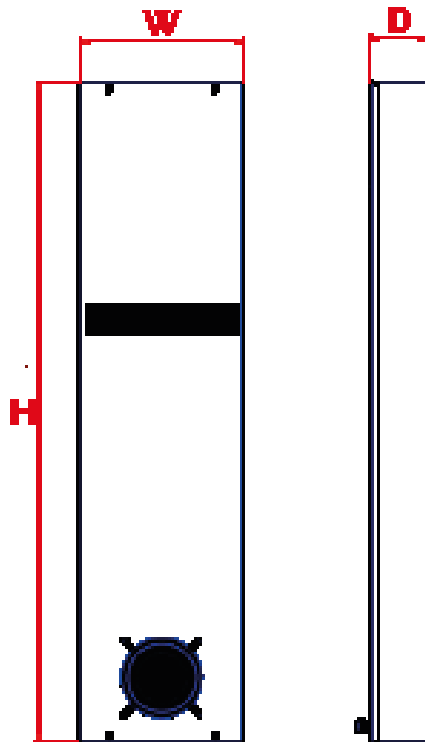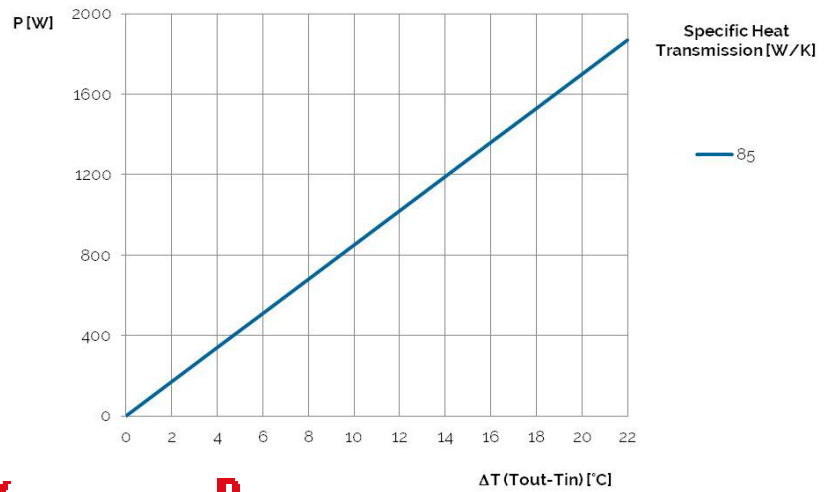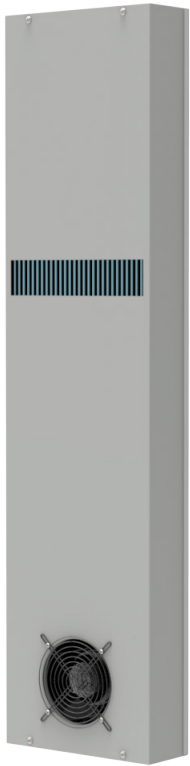

CODICE - CODE - ARTIKELNUMMER - CODIGO

M.U.

XVAgoT0120

XVAgoT0220

Resa Specifica - Specific heat transmission - Spezifische Leistung - Rendimiento específico

W/K

85

85

UL

--

--

Alimentazione Power supply - Spannungsversorgung - Tensión

V-ph-Hz

230-1-50/60

230-1-50/60

Altezza / Larghezza / Profondità - Height / Width / Depth - Höhe / Breite / Tiefe - Altura / Ancho / Profundidad (HxWxD)

mm

1250x311x108

1250x311x108

Corrente assorbita - Absorbed current - Stromaufnahme - Corriente absorbida

A

1,1 / 1,5

1,1 / 1,5

Fusibile T - Pre-Fuse T - Absicherung T - Elemento previo de fusibile T

A

2

2

Potenza Assorbita - Power consumption - Leistungsaufnahme - Potencia absorbida

W

250 / 340

250 / 340

Limiti Interni Temperatura - Internal Temperature limits - Internen Temperaturgrenzwerte - Limites de temperatura interna

°C

- 5 / +55

- 5 / +55

Limiti Temperatura lato Ambiente - Side ambient Temperature limits - Umgebungstemperatur - Limites Temperatura lado ambiente

°C

- 5 / +55

- 5 / +55

Protezione lato armadio - Side cabinet protection degree - Schutzgrad Schrankseite - Protección lado armario

IP/Type

55 / -

55 / -

Rumorosità - Noise level - Geräuschpegel - Nivel de ruido

dB(A)

75

75

Peso - Weight - Gewicht - Peso

kg

20

20

Installazione - Installation - Installation - Instalación

Internal

External

Termostato Meccanico - Mechanical Thermostat - Mechanischer Thermostat - Termostato mecánico

Yes

Yes